


**Lumenition Optronic® Setup for Fiat Dino, Ferrari Dino 246 and Lancia Stratos
Optical Pickup (modified Marelli Magneti S125 AX/BX/C distributor)**

V 1.1 info@dinoplex.org 09/2009

www.dinoplex.org

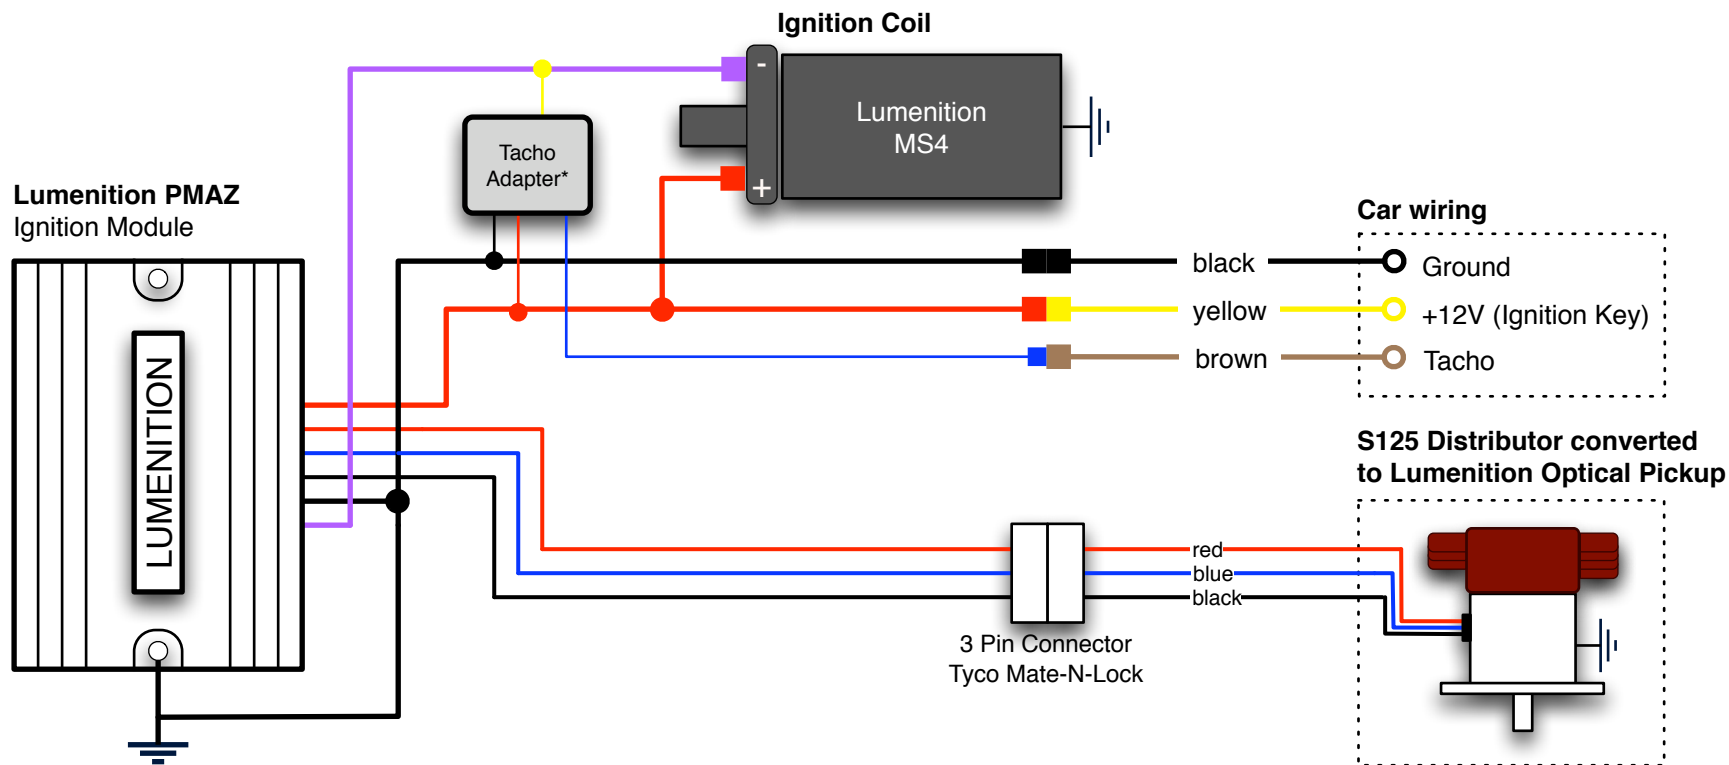

This setup is a replacement for a Dinoplex AEC 101 or 103, it is based on a Lumenition Optronic® constant energy inductive ignition (PMAZ) combined with an optical pickup (OS50). Lumenition recommends the MS4 coil, it is also possible to use an existing or third party coil if the resistance (including ballast resistor) is not below 3 ohm.

The Lumenition Optronic optical pickup OS50 requires an adaption kit such as the F425 or F9. Both kits need to be modified, as the F425 chopper is slightly too large and the F9 chopper a bit too small.

*To drive the electronic Veglia tacho, a tacho adapter for converting the coil high voltage impulse into a +12 volt squarewave signal is required. It is recommended to install an active electronic tacho adapter, such adapters can be recognized by an additional wire going to +12 volt. As