Winterburn CDI Ignition, Replacement for a Marelli AEC103A
Ferrari Dino 246 Wiring, '70 Europe, two terminal connector

V 1.1 12/2013, Copyright www.dinoplex.org, info@dinoplex.org

This wiring diagram applies to the Ferrari Dino 246 (late M and early E Series).
Ensure that the rotary switch on the Winterburn ignition is set to the CD position.
Use a compatible CDI coil capable of handling the higher voltage, such as the MSD 8202.
In the event of a CD ignition failure, simply connect the distributor terminal plug to the Emergenza connector, as with the original AEC103A.

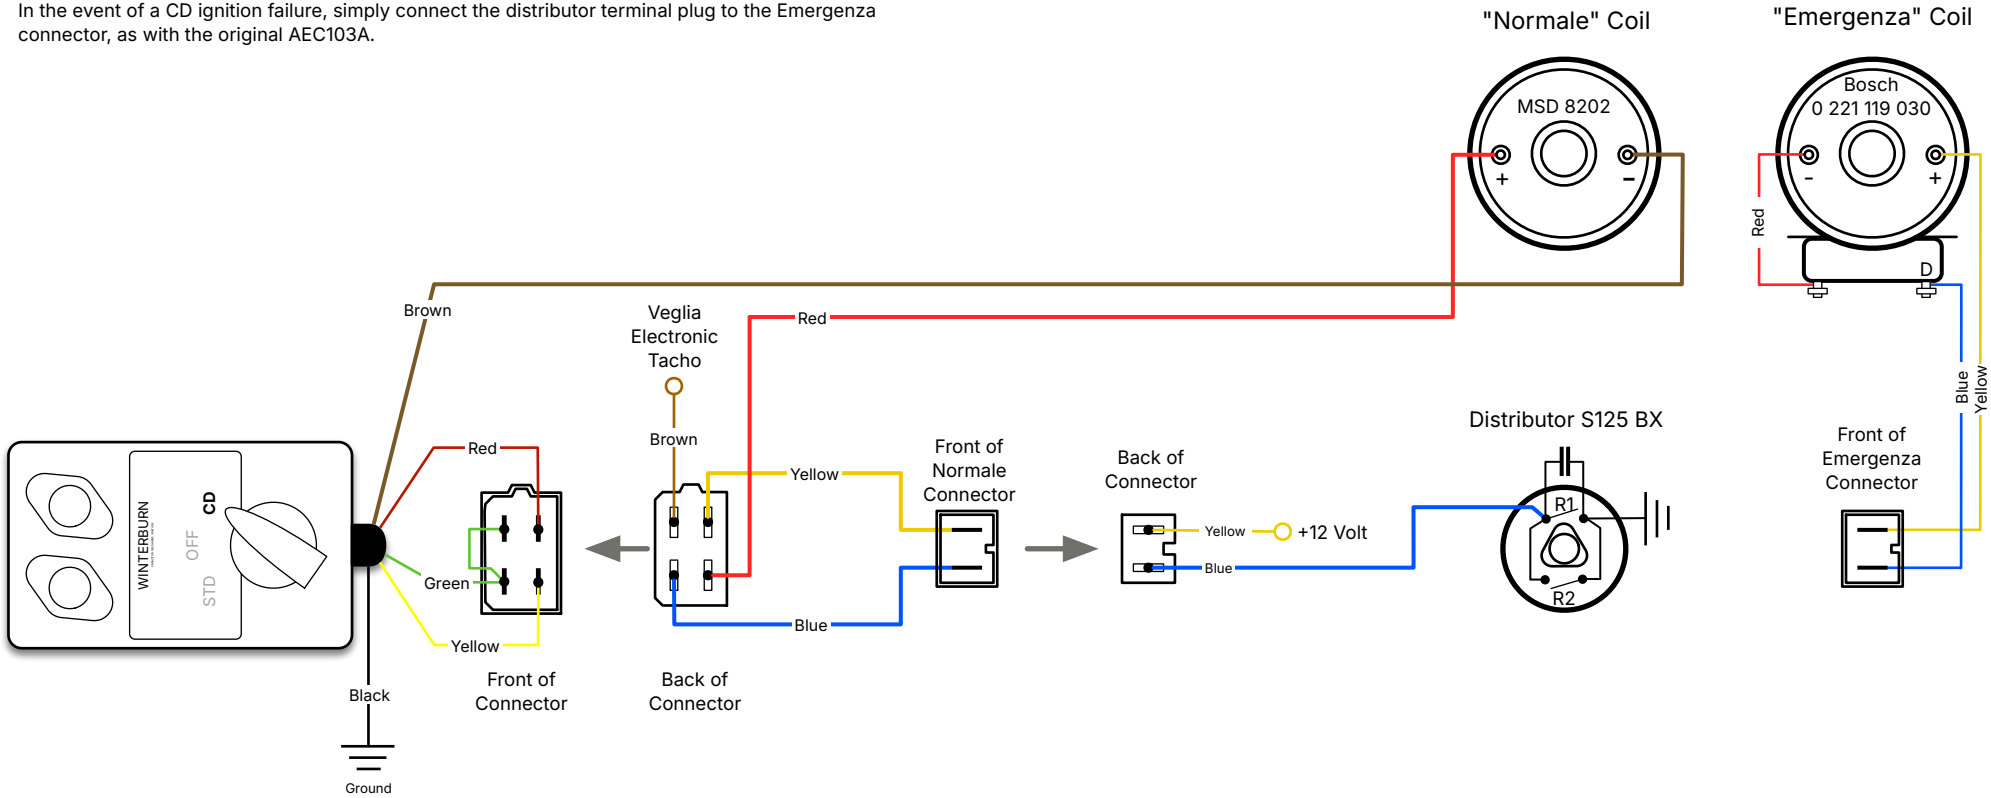

AEC103A Connector, Front



1. +12V from ignition key, yellow wire
2. to ignition coil terminal 'K', red wire
3. 'D' from distributor points R1, blue wire
4. to Veglia tachometer, brown wire